


PAULOWNIA & BASSWOOD SHUTTER REFERENCE

www.opusshutters.com.au





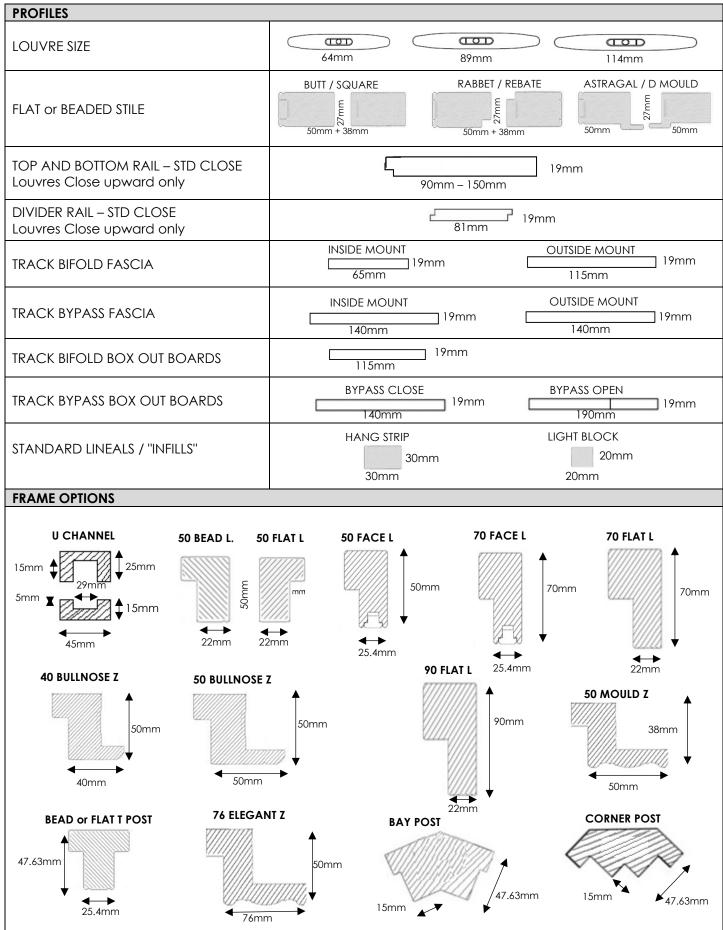

PAULOWNIA & BASSWOOD SHUTTER REFERENCE

www.opusshutters.com.au

PROPERTIES		
MATERIAL	Finger Jointed Basswood & Paulownia, Full lengths Paulownia	
FINISH	Gesso Acrylic undercoat, PU paint or Stain	
APPLICATION	Internal only	
WET AREAS	NO	
STILE INSERT	NO - solid wood	
LOUVRE INSERT	NO - solid wood	
OPTIONS		
TILT ROD	Clearview, U.S.A (Centre) & Gear (Invisible Tilt)	
SPECIAL SHAPES	YES (Allow extra lead time)	
HINGES	Non-mortise, Pivot Hinge or Stainless Steel	
BAY & CORNER POSTS	YES	
U CHANNEL & TRACK SHUTTERS	YES	
COLOURS	5 paints, 10 stains, 5 Texture Coat Colours	
CUSTOM COLOUR	YES – Any colour (Allow extra lead time)	
MOTORISATION	YES – Battery only	

SPECIFICATIONS		MINIMUM	MAXIMUM	
		HINGE PANEL WIDTH EXCL. FRAME	228mm	914mm
		HINGE PANEL HEIGHT EXCL. FRAME	350mm	2500mm
Max. 2 x panels to one side		HINGE BIFOLD PANEL WIDTH EXCL. FRAME	228mm	450mm
		HINGE BIFOLD PANEL HEIGHT EXCL. FRAME	350mm	1500mm
	WALL	FIXED PANEL WIDTH EXCL. FRAME	228mm	914mm
	WALL	FIXED PANEL HEIGHT EXCL. FRAME	350mm	2500mm
		TRACK BIFOLD PANEL WIDTH	228mm	600mm
		TRACK BIFOLD PANEL HEIGHT	350mm	2500mm
		TRACK BYPASS PANEL WIDTH	228mm	914mm
		TRACK BYPASS PANEL HEIGHT	350mm	2500mm
		CO-JOINED WITH HINGES - BYPASS PANELS	YES	
		MAX PANEL HEIGHT WITHOUT DIVIDER RAIL	1800mm	
		2 nd DIVIDER RAIL IF PANEL HEIGHT ABOVE	2348mm	
		Acceptable divider rail deviation 40mm Critical divider is exact		
		_		

FACTORY	DEDUCTIONS	

FRAME TYPE	INSIDE MOUNT - WINDOW SIZE	OUTSIDE MOUNT
ALL L FRAME	4mm from total width, 4mm from total height	NIL
ALL Z FRAMES	5mm from total width, 5mm from total height	NOT AVAILABLE
U CHANNEL TOP AND BOTTOM	3mm from total width, 30mm from panel height	NOT AVAILABLE
NO FRAME	6mm from total width, 6mm from total height	NIL
BAY WINDOWS	Standard deduction from total width & height	NIL
CORNER WINDOWS	Standard deduction from total width & height	NIL
TRACK SHUTTERS	4mm from total width, 4mm from total height	NIL

